


Dahua Thermal Camera

Efficient, Visible, Real-Time
Thermal Temperature Monitoring Solution



Non-contact

Manageable

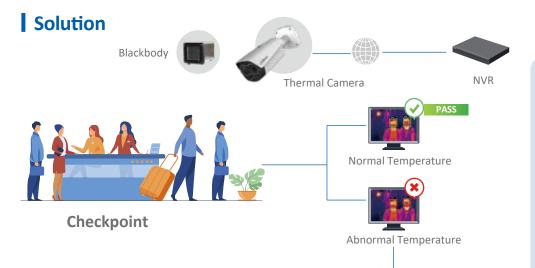

- Accurate temperature monitoring
- Fast screening without personal contact
- Monitoring of multiple people at the same time for greater efficiency
- Visual alert when abnormal results are detected

Application Scenario



Airport

Hospital



Re-inspection Area

Public Transportation



Education

camera 9.8ft (3m)

Set-up



Commercial Building



Product Recommendation



DH-TPC-BF5421-T

Hybrid thermal camera Athermalized lens Visible 2MP, 8mm lens Thermal 300x400, 13mm



JQ-D70Z

Blackbody Required for human body temperature (includes power adapter)



• Distance between camera and blackbody 9.8ft (3m)

• Channel Width 4.3ft (1.3m)

• Distance between human and

Accessories

Each thermal camera requires a blackbody device for a $1\ \mbox{to}\ 1$ ratio. The set also requires two tripods and two connectors, one for the camera and one for the blackbody device.







DHL43-F600 Monitor (x1)

Camera PSU DH-PFM320D-US DC12V 2A PFM321D-US



DHI-NVR5216-16P-I 4TB

16-Channel 1 U 16 PoE NVR Statistical report and export

4 channels mask detection / 4 channels face recognition



